


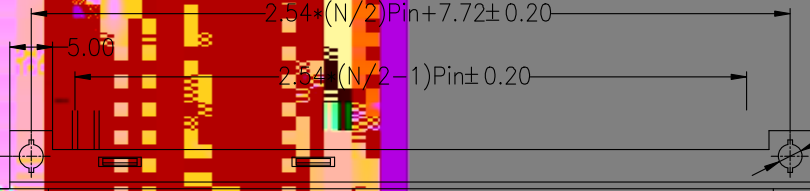


**SPECIFICATIONS**

Rated Current: 3.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 245°C±5°C, 10s(PBT insulator)

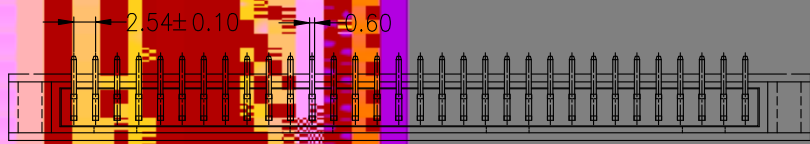

				OPERATION	DRAW	YiYuSheng	14.09.16	SCALE	FIT			
				X.X ±0.30	CHECK				UNIT	mm		
				X.XX ±0.20					SIZE	A4	PART NO.	
				X.XXX ±0.10					SHEET	1/1		
A0	2014.04.11	NEW DRAWING		Angle ±3'	APPROVE				PROJ.	∅	TITLE:	
REV	DATE	MODIFICATION DESCRIPTION		DIM TOL								
1	2	3	4	5	6	7	8	9				