
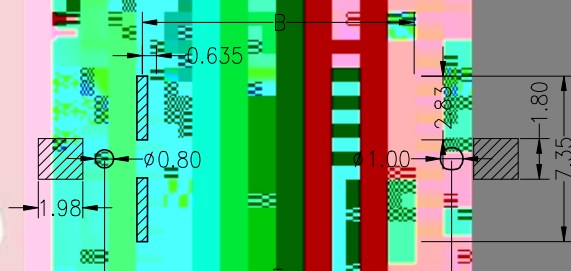

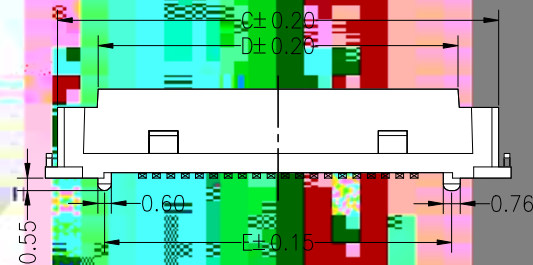


SPECIFICATIONS  
PERFORMANCE

Electical Rating: AC/DC 50V 0.5A  
 Insulation Resistance: 500MΩ Min  
 Withstand Volt: 200V AC/minute  
 Contact Resistance: 30mΩ Max  
 Opratng Temperature: -40°C to +105°C  
 Material  
 Contact: Phosphor Bronze Gold-Plated  
 Housing: LCP UL94V0  
 Max. Processing Temp: 260°C ± 5°C 5S

Fl 1

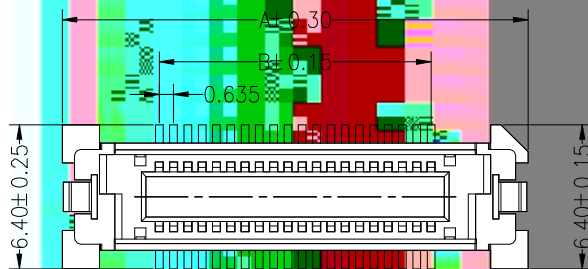

Recommended P.C.B. Layout (Top Side)  
(PCB BOARD TOLERANCE ± 0.05)

				OPERATION	DRAW	Jelly Feng	2022.12.17	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X ± 0.30	CHECK			UNIT	mm		
				X.XX ± 0.20				SIZE	A4		
				X.XXX ± 0.10				SHEET	1/1		
A	A0	2022.12.17	NEW DRAWING	Angle	± 3°	APPROVE			PART NO.	3722MXXX040XXFX0X	
	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	PROJ.	TITLE:		0.635BTB H4.0 Male	
	1			2							

