


# HSF RoHS



## SPECIFICATIONS

Current rating: 5.6AMP.  
 Contact resistance: 15mΩ max. at 100mA DC  
 Insulation resistance: 1000 MΩ min. at 500V DC  
 Dielectric withstanding voltage: 1500V AC For 1minute  
 Operating temperature: -55°C TO +125°C

Contact Material: Copper Alloy  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 245°C±5°C For 5 Second

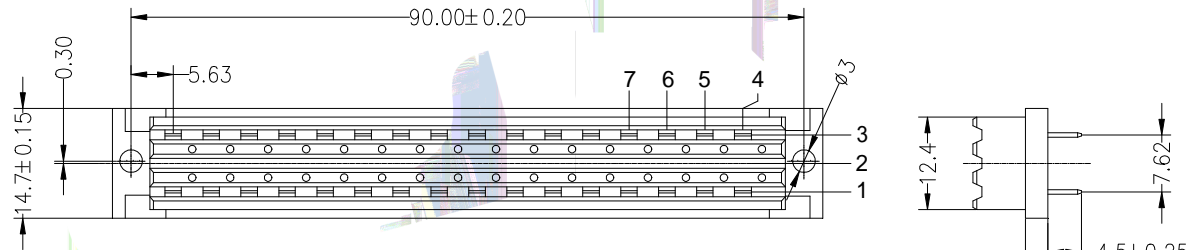

注: 缺b排

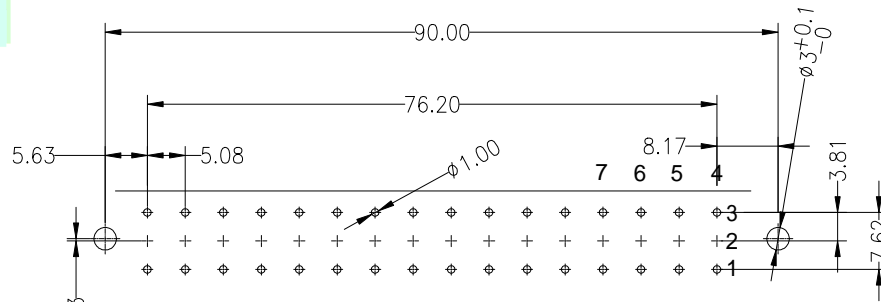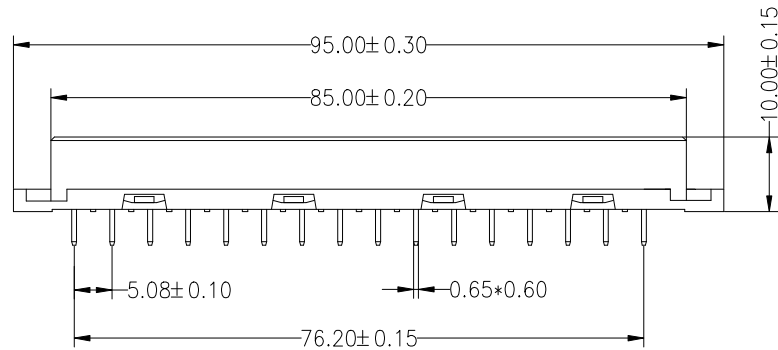

PCB LAYOUT(RECOMMENDED)  
 (TOP VIEW TOL. ±0.05)

## Ordering Information

**35133 32 A F S XX B NAX**

No.of Pins  
32PIN

Contact Type  
F=Female

Contact Plating  
 G0:Gold Flash  
 S0:Gold Flash/Tin  
 S1:3U" Gold/Tin  
 S2:5U" Gold/Tin  
 S3:10U" Gold/Tin  
 S4:15U" Gold/Tin  
 S5:30U" Gold/Tin

Code Stream

OPERATION		DRAW	Jelly Feng	2023.03.29	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL				TITLE:	DIN 41612 of 5.08mm pitch large current F-type low plastic

**JILN**® 深圳市锦凌电子有限公司  
 ! " # \$ ! " # & # ( ' # ) % " ( " \* + , - # ' \* % \* - / ( + 0  
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO. 351332AFSXXBNAX  
 TITLE: DIN 41612 of 5.08mm pitch large current F-type low plastic

A0	2023.03.29	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE