



SPECIFICATIONS

Current Rating:3.0AMP
 Contact Resistance:10mΩ Max
 Dielectric Strength:Min 1000V AC RMS
 Operation Temperature:-40°C to +105°C


Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PPS
 Soldering Temperature:260°C±5°C For 5~10 Second

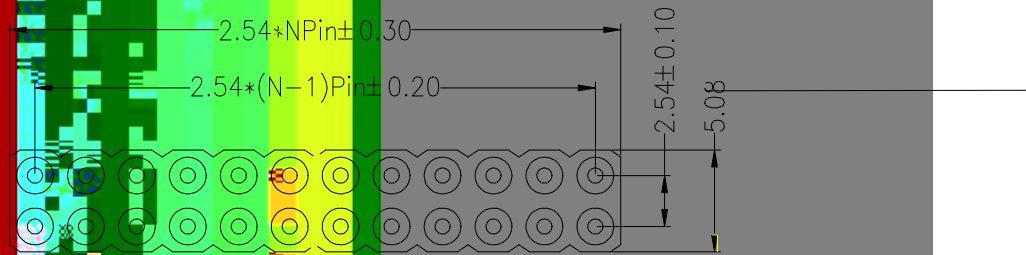

Ordering Information

3610 30 2 XX S XX 120 XX

No. of Pins Per Row NPin N=02~40	Contact	Plating	Pin Length 120=12.01mm
	G1:1U"	Gold	
	G2:1.5U"	Gold	
	G3:2U"	Gold	
	G4:3U"	Gold	
G5:5U"	Gold		
S0:Gold Flash/Tin			
SN:Tin			

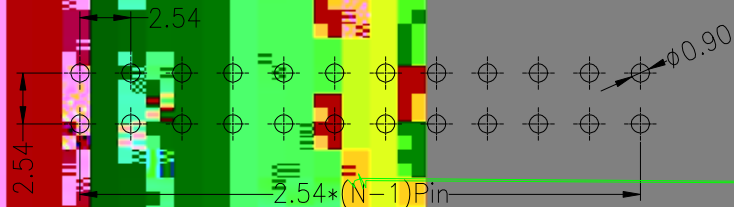

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)