




SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 260° C±5° C, 10s(PA6T&PA9T&LCP insulator)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

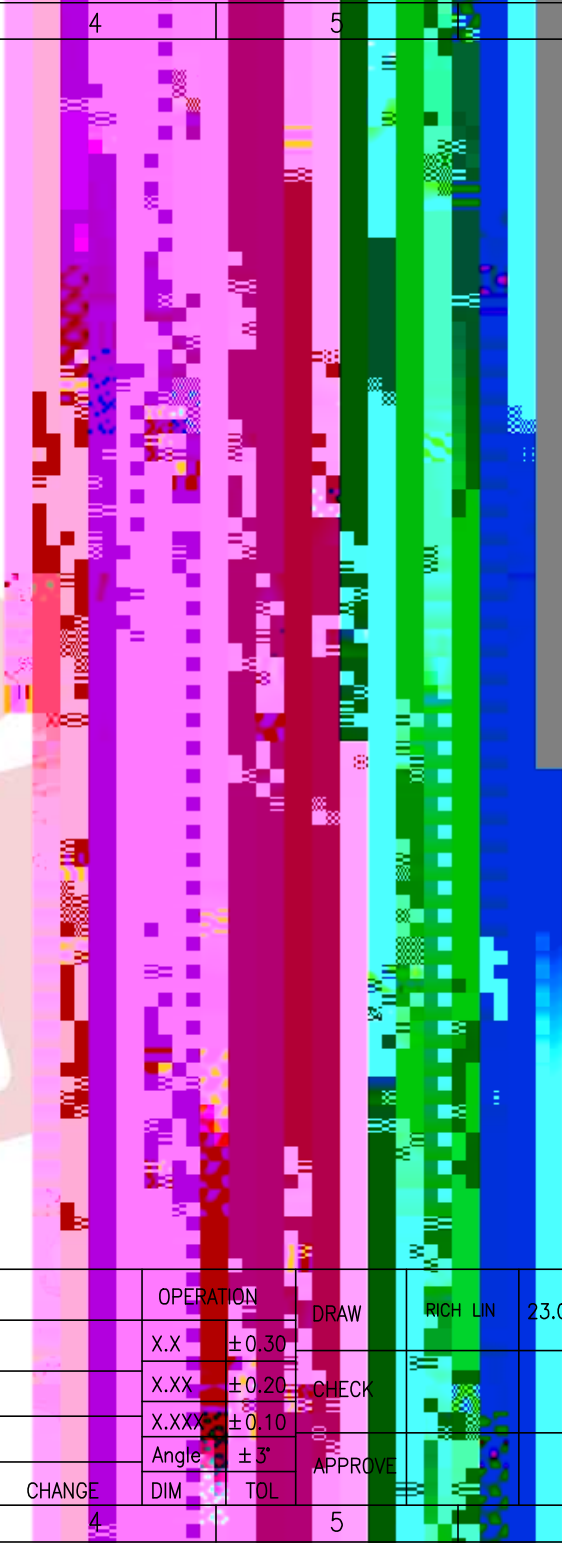

G
F
E
D
C
B
A

G
F
E
D
C
B
A

				OPERATION	DRAW	RICH LIN	23.06.10	SCALE	FIT	深圳市 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5992	
				X.X ±0.30				UNIT	mm		
				X.XX ±0.20	CHECK			SIZE	A4	PART NO.	142511XXXNXXZXXX0X
A0	2023.06.10	NEW DRAWING		X.XXX ±0.10				SHEET	1/1	TITLE:	1.27mm Pin Header 贴片
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ±3'	APPROVE			PROJ.	☯		
				DIM TOL							

1 2 3 4 5 6 7 8 9